

SDI-2331DN-IR

3.0 MP Full HD CCTV D/N IR Dome Camera



Wall-Mount Bracket
(Optional)




Ceiling-mount
Bracket

Specifications

Feature

- Full HD 1920x1080P@50/60fps (3G-SDI) Infrared Camera
- 1/2.8" Sony 3.0 Megapixel Progressive Exmor™ CMOS Sensor
- 0.00Lux (IR LEDs on at 2 Lux)
- Simultaneous Video Output: SDI / Composite BNC
- Multi-Language OSD Control
- OSD Control / by RS485 Remote Control / by Coaxial Control
- 2D Noise Reduction & Sense Up Functions
- Shutter Mode (AUTO / MANUAL)
- Mechanical IR Cut Filter (ICR)
- RS-485x1, Dlx1, DOx1 / Option: PoC + Audio

Dimension(unit:mm)

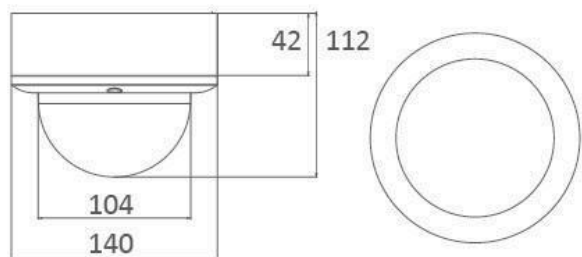

Onlinecamerashop.NL
Derde hoeve 3A
Maasdijk
020-7767788



Model	SST-JES-12331DNIR
Video System	PAL / NTSC Selectable
Image Sensor	1/2.8" Sony 3.0 Megapixel Progressive Exmor™ CMOS Sensor
Resolution	1920(H)x1080(V)
Frame Rates	1920x1080P@50/60fps ; Adjustable to 1920x1080P@25/30fps, 1920x1080i@50/60fps
SDI Standards	3G-SDI (SMPTE 424M)
Minimum Illumination	0.00Lux
Digital Wide Dynamic Range	512x Normal Camera (54dB)
Digital Video Output	BNC connector (SDI) x1
Analog Video Output	BNC connector (1.0Vp-p Composite, 75Ω) x1
Audio	Option: Two-way Audio
Mechanical IR Cut Filter	Automatically Switches (B/W Mode<2Lux, Color Mode>5Lux)
IR LED ; Working Distance	30 units (IR LEDs on<2Lux, IR LEDs off>5Lux) ; 10~20m
OSD Menu	OSD Control / by RS485 Remote Control / by Coaxial Control
Digital Day&Night Mode	COLOR / B&W / AUTO
Muθ-Electronic Shutter	Auto Shutter: Self Defined Auto Shutter Speed Range Programmable Manual Shutter: 1/50(60), 1/100(120), 1/150(180), 1/200(240), 1/250, 1/300, 1/350, 1/400, 1/450, 1/500, 1/600, 1/750, 1/1,000, 1/2,000, 1/3,000, 1/4,000, 1/10,000 sec.
Automatic Gain Control	128 Levels (Adjustable Level Settings)
White Balance	ATW / AWB / MANUAL / PUSH LOCK / 3200K / 6300K
WDR ; BLC	WDR / BLC / OFF
Flickerless	PAL 50Hz / NTSC 60Hz / OFF
Dynamic Noise Reduction	2D
Sense Up	ON (2~6X) / OFF
Language	ENGLISH, JAPANESE, TRADITIONAL CHINESE, SIMPLIFIED CHINESE (Option Not Changeable)
I/O Connector	RS-485(Pelco-D/P)x1 / Dlx1 / DOx1, Option: Audio In(3.5mm)x1 / Audio Out(3.5mm)x1
Automatic IRIS ; Connector	DC
Lens Mount	Built-in DC Auto IRIS Lens
Lens, Angle of View (H)	f3.0~10mm/F1.3 Megapixel Varifocal D/N Lens/95.6°~28.8°
Water Resistance	IP66
Max. Breaking Strength	656.1 Kgf
Power Supply ; Consumption	Standard:12Vdc, Option:12Vdc/24Vac, PoC (Power over Cable) ; 9W
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C
Operation ; Storage Humidity	Maximum: RH80% ; RH90%
Dimensions	140(DIA)x112(H)mm
Net Weight	1,000g
Accessories Option	Wall Bracket ; Ceiling Bracket ; SDI Receiver:

