


2.0 Megapixel 1080P WDR IP IR Bullet Camera (Outdoor)

SST-CNS-BUI07


- 1 / 2.8" Sony 2.0 Megapixel Progressive Exmor™ CMOS Sensor
- 1920x1080P@30fps (1080P) ; H.264 High Profile, MPEG4, M-JPEG
- 0.0001Lux (IR LEDs on at 2 Lux)
- 2D Noise Reduction & Sense Up
- Motion Detection & Alarm Trigger
- Two-way Audio & Support Multicast
- Built-in Aspherical D/N Lens (f3.3~10mm)
- Support 12Vdc / PoE Power Input
- Support ONVIF 2.0 and PSIA



Wide
Dynamic

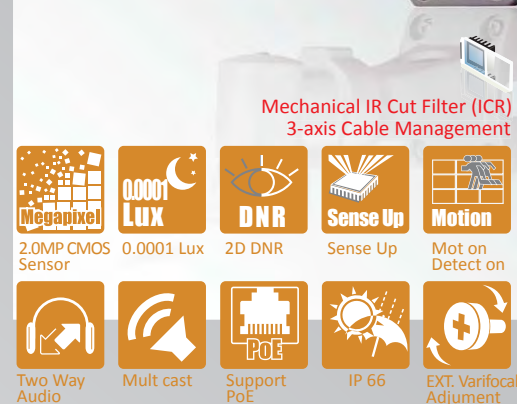

Dimensions

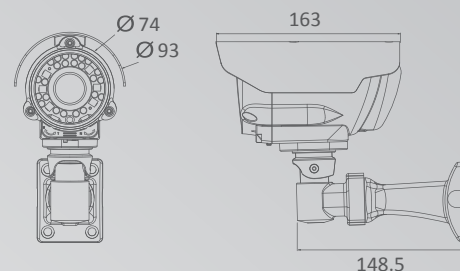

UNIT : mm / TOL : ±0.5

Specifications

Video	Image Sensor	1 / 2.8" Sony 2.0 Megapixel Progressive Exmor™ CMOS Sensor
	Video Resolution/Frame Rate	1920x1080P@30fps (1080P) ; 1280x1024@30fps, 1280x960@30fps, 1280x720@30fps, 720x480@30fps
	Video Frame Rate	Up to 30fps for All Video
	Video Compression	H.264 High Profile, MPEG4, M-JPEG
	Minimum Illumination	0.0001Lux (IR LEDs on at 2 Lux)
	Digital Wide Dynamic Range	10 Levels (Adjustable Level Settings)
	Second Video Output	1.0Vp-p Composite, 75Ω (BNC)
	Signal to Noise Ratio	More than 58dB (AGC off)
	Mechanical IR Cut Filter	Automatically Switches (B/W Mode<2Lux, Color Mode>5Lux)
	IR LED ; Working Distance	30 units (6 Pcs HP Reflect on LEDs) (IR LEDs on<2Lux, IR LEDs off>5Lux) ; 25~35m
Function	Menu	Can Be Set Via Browser
	Day&Night Mode	Color / B&W / Auto / External
	Auto Electronic Shutter	1/100,000 to 1/2 sec.
	Manual Electronic Shutter	1/2, 1/4, 1/8, 1/15, 1/30, 1/60, 1/120, 1/250, 1/500, 1/750, 1/1,000, 1/1,500, 1/2,000, 1/10,000, 1/100,000 sec.
	White Balance	Auto_wide / Auto_normal / Sunny / Shadow / Indoor / Lamp / FL1 / FL2
	DNR ; Sense Up	2D DNR ; Yes
	Language	English / Japanese / Chinese (Traditional, Simplified) / Russian / Hungarian / German / Persian / Spanish / Polish / Dutch
	Image Settings	Brightness / Contrast / Saturation / Sharpness / DeNoise / EV Compensation / AWB / WDR / Rotation / Exposure Mode / Exposure Priority / Auto IRIS / Wide Dynamic Range
	Motion Detect on	Yes
	Timer Clock	Yes
	Camera Control Interface	Pelco D, Pelco P, Customer
Network	Browser	IE 8.0 or Above
	Ethernet	10/100M Auto Negotiation
	Bit Rate Transmission	64 up to 12,000 Kbps
	Supported Protocols	TCP, UDP, HTTP, SMTP, FTP, NTP, DNS, DHCP, PPPoE, ARP, UPnP, RTSP, RTP, SNMP, TRAP, Ethernet (RJ-45 Wired 10/100 Base-TX)
	Video Streaming	H.264, MPEG4 and M-JPEG Dual/Triple Streaming
	Audio Streaming	Two-way Audio ; G.711 (μLaw), 8KHz/16KHz Sample Rate
	Users	Support 9 Users
	Security	ID/Password Protection
	Alarm Trigger	File Upload via FTP and Email/Notification via Email, HTTP, External Digital Output Activation, micro SD Recording
	Multicast	Support Multicast Function
General	Connector	Audio, RJ45/PoE, DC Power Jack, BNC, Reset Button, RS485
	Alarm In / Alarm Out	DI/DO
	Automatic IRIS ; Connector	DC
	Lens Mount	Built-in DC Auto IRIS Lens
	Lens, Angle of View (H)	f3.3~10mm/F1.3 Aspherical Megapixel Varifocal D/N Lens/95.6°~28.8°
	Water Resistance	IP66
	Max. Breaking Strength	NA
	Power Supply ; Consumption	12Vdc / PoE (Only Work with Full Power PoE Switch, 15W/CH) ; 9W
	Operation ; Storage Temp.	-10°C ~ 50°C ; -20°C ~ 60°C
	Operation ; Storage Humidity	Maximum: RH80% ; RH90%
	Dimensions	93(DIA)x163(D)mm
	Net Weight	1,000g

ONVIF