


TS-SG801-M-600

TURBOO

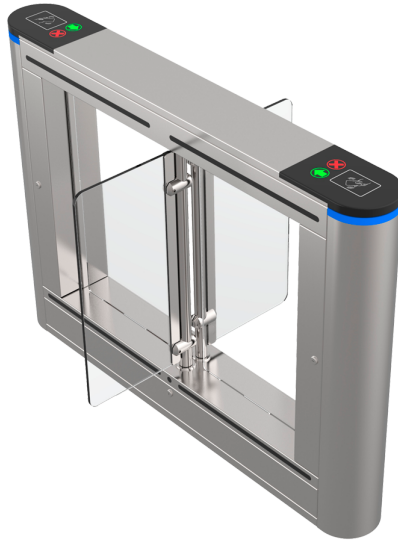

Features

- Bi-directional two-gantry double motorized gate lathe
- Automatic movement of the acrylic barrier in the walking direction
- ECO Engine: 3.000.000 of cycles
- Pitch width of 600 mm
- Status LED indicator
- Emergency mode: main configuration board of the winch (opening times, counter, relay inputs) with display
- Secondary board for connection to main board
- Made of stainless steel SUS304 and acrylic barriers
- Configuration Modes: one-way or two-way, free passage in one or two directions
- Compatible with third-party Plug & Play Access Control systems
- Ergonomic design
- Universal covers for card readers
- Each unit adds an additional aisle to TS-SG801-600
- TS-SG801-600 required for complete installation

Specifications

Model	TS-SG801-M-600
Controller	Winch control board with display compatible with any Access Control system
Led indicator	LED turnstile status indicators
Barrier movement	Opening angle of the acrylic barrier in the direction of travel (entry or exit)
Emergency mode	Emergency barrier opening with fire signal Automatic barrier opening in case of power failure (battery back-up included)
Security	Unauthorized access with sound and lockout Anti-tailgating configurable with sound and shutdown
Compatibility	Integrates with any third party Plug & Play Access Control / Universal caps for RFID readers
Configuration Modes	One or two directions / Free passage in one direction and Access Control in the opposite direction
Manufacturing material	Stainless steel SUS304 with acrylic doors and PC lids
Passage speed	30-40 persons/minute
Reliability	Brushed motor 3.000.000 of cycles
Infrared sensors	5 infrared sensor pairs
Power	AC 110/220 V / 35 W max.
Temp. operation	-25° C ~ +70° C
Lane Width	600 mm (intermediate lathe, size 300 mm)
Dimensions of pass	300 (w) x 1400 (d) mm
Dimensions	1020 (H) x 185 (W) x 1400 (D) mm
Weight	65 kg
Protection	Interior

Dimensions

