

VTH2421FB/FW

IP Indoor Monitor



Features

- 7" TFT Capacitive touch screen, 1024x600
- IPC surveillance
- Alarm integration
- High performance & Cost-effective



General




Installation	Surface & Desktop
Power	DC 12V
Power Consumption	Standby ≤1W, Work ≤7W
Working Temperature	-10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	119.6mm×221.5mm×21.5mm
Weight	0.35Kg

Technical Specification

Model	VTH2421FB/FW
System	
Main Processor	Embedded Micro Processor
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Audio	
Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk
Display	
LCD Screen	7" 1024x600, Capacitive
Operation Mode	
Input	Touch Screen
Interface	
Alarm In	6
Alarm Out	1
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP

Dimensions

View Area

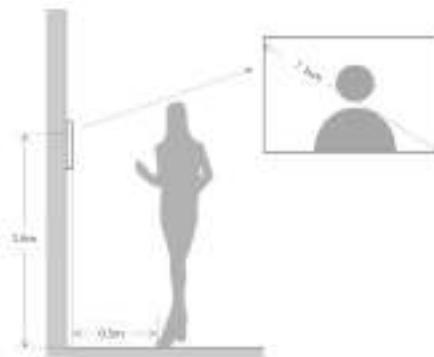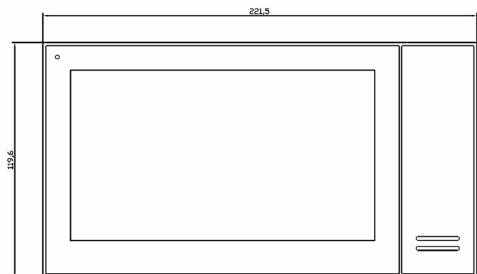

Application

